


# AIR TERMINAL BASE, STAMPED NARROW, IMPERIAL THREAD



## CERTIFICATIONS



## FEATURES

For use on narrow flat surfaces

Positive single bolt tension for multi-directional cable clamping


## SPECIFICATIONS

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

Finish: Tinned

Catalog Number	Material	Thread Size(TS)	Hole Size(HS)	Depth(D)	Width(W)	Height(H)	Unit Weight
LPA30412	Aluminum	1/2" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.100 lb
LPA30458	Aluminum	5/8" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.100 lb
LPC30412	Copper	1/2" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.250 lb
LPC30438	Copper	3/8" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.250 lb
LPC30458	Copper	5/8" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.250 lb
LPC304L12	Copper	1/2" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.250 lb
LPC304L38	Copper	3/8" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.250 lb
LPC304L58	Copper	5/8" UNC	0.200"	2 1/8"	4 1/4"	1.653"	0.250 lb

## DIAGRAMS

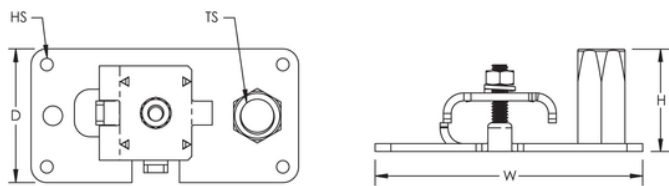

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

### Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

### Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

### APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:  
**nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF**  
**TRACER**