


AIR TERMINAL BASE, IMPERIAL THREAD



CERTIFICATIONS



FEATURES

Install with adhesive or screw down fixings

Mechanical connection recommended for vertical installation

Positive single bolt tension for multi-directional cable clamping


SPECIFICATIONS

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

Catalog Number	Material	Finish	Thread Size(TS)	Mounting	Hole Size(HS)	Depth(D)	Width(W)	Height(H)	Unit Weight
LPA30512	Aluminum	Bare	1/2" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.275 lb
LPA30512 THRU	Aluminum	Bare	1/2" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.275 lb
LPA30558 H	Aluminum	Bare	5/8" UNC	Horizontal	1/4"	2.900"	3.070"	1"	0.275 lb
LPA30558 THRU	Aluminum	Bare	5/8" UNC	Horizontal	1/4"	2.900"	3.070"	1"	0.275 lb
LPA30558 V	Aluminum	Bare	5/8" UNC	Vertical	1/4"	2.900"	3.070"	1"	0.275 lb

Catalog Number	Material	Finish	Thread Size(TS)	Mounting	Hole Size(HS)	Depth(D)	Width(W)	Height(H)	Unit Weight
LPC30512	Copper	Bare	1/2" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC30512 THRU	Copper	Bare	1/2" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC30538	Copper	Bare	3/8" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC30538 THRU	Copper	Bare	3/8" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC30558 H	Copper	Bare	5/8" UNC	Horizontal	1/4"	2.900"	3.070"	1"	0.835 lb
LPC30558 THRU	Copper	Bare	5/8" UNC	Horizontal	1/4"	2.900"	3.070"	1"	0.835 lb
LPC30558 V	Copper	Bare	5/8" UNC	Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC305L12	Copper	Tinned	1/2" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC305L38	Copper	Tinned	3/8" UNC	Horizontal or Vertical	1/4"	2.900"	3.070"	1"	0.835 lb
LPC305L58 H	Copper	Tinned	5/8" UNC	Horizontal	1/4"	2.900"	3.070"	1"	0.835 lb
LPC305L58 V	Copper	Tinned	5/8" UNC	Vertical	1/4"	2.900"	3.070"	1"	0.835 lb

DIAGRAMS

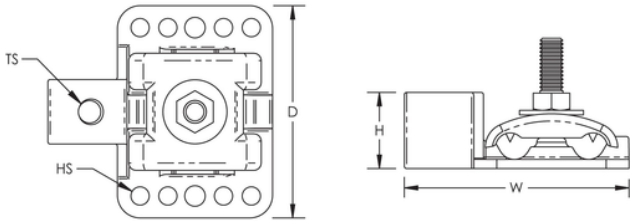

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠️ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER