



Nipples

Description:

Procoat factory threaded nipples save you time and money in the field. Electrical continuity is maintained across assembled joints.

**The exteriors of certain short nipples are coated with urethane in lieu of PVC. This is dictated by the manufacturing process as well as assembly considerations.*

Features:

- 40 mil gray PVC exterior coating
- 2 mil gray urethane interior coating
- 12 trade sizes from 1/2" through 6"
- 11 standard lengths in available:
Close, 2" to 12"
- Made to order lengths available – Call for quote
- Plastic thread protector caps are color coded for quick identification of conduit size.

Thread Protector Cap Colors:

Black - for 1/2" sizes, 1/2", 1-1/2", 2-1/2", 3-1/2"

Red - for 1/4" sizes, 3/4", 1-1/4"

Blue - for even sizes, 1", 2", 3", 4", 5", 6"

Standards:

Steel and Aluminum

- UL 6 (E2314); UL 6A (E98405)
- CSA C22.2 No. 45
- Both PVC and zinc coatings have been investigated as primary protection against corrosion. Restricted for use with threaded fittings only.

Simple Steps To Ordering


To order the Procoat coated nipples, follow this simple formula to create your KorKap catalog number.

Use the size exactly as shown in the chart, including the hyphen and slash symbols.

TRADE SIZE (INCH)

1/2 = 15
3/4 = 20
1 = 25
1-1/4 = 32
1-1/2 = 40
2 = 50
2-1/2 = 65
3 = 80
3-1/2 = 90
4 = 100
5 = 125
6 = 150

The catalog number for a Procoat coated steel, 1-1/2" nipple with a length of 12":
GN40120P

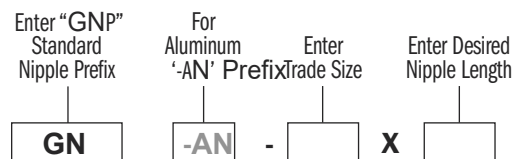

This number can then be looked up in the listing of pricing to determine price and availability.