

Pipe Straps

Procoat PVC coated pipe straps are used to securely mount conduit to a wall or other structure for support. They are available in two styles: a one-hole malleable iron strap or a two-hole stamped steel strap.

Features:

- 20 mil gray PVC exterior coating
- 10 trade sizes from 1/2" through 4"



CONDUIT PIPE STRAP 1 HOLE

PIPE SIZE	FERROUS CATALOG #	NOMINAL WT. FOR 100
1/2"	RSM15P	11.0
3/4"	RSM20P	14.0
1"	RSM25P	12.0
1-1/4"	RSM32P	25.0
1-1/2"	RSM40P	36.0
2"	RSM50P	71.0
2-1/2"	RSM65P	111.0
3"	RSM80P	134.0
4"	RSM100P	256.0

CONDUIT PIPE STRAP 2 HOLE

PIPE SIZE	FERROUS CATALOG #	NOMINAL WT. FOR 100
1/2"	RSD15P	2.0
3/4"	RSD20P	3.0
1"	RSD25P	4.0
1-1/4"	RSD32P	4.5
1-1/2"	RSD40P	5.0
2"	RSD50P	10.0
2-1/2"	RSD65P	13.0
3"	RSD80P	17.0
4"	RSD100P	25.0

Clamp Back Spacers

Procoat PVC coated clamp back spacers are used with malleable or stamped pipe straps to provide a mounting stand-off for a conduit from a wall or other structure.

Features:

- 20 mil gray PVC exterior coating
- 10 trade sizes from 1/2" through 4"



CONDUIT CLAMP BACK SPACER

PIPE SIZE	FERROUS CATALOG #	NOMINAL WT. EACH
1/2"	BSC15P	0.1
3/4"	BSC20P	0.1
1"	BSC25P	0.1
1-1/4"	BSC32P	0.2
1-1/2"	BSC40P	0.2
2"	BSC50P	0.3
2-1/2"	BSC65P	1.0
3"	BSC80P	1.7
4"	BSC100P	2.0

Conduit Clamp Hangers

Procoat PVC coated conduit clamp hangers are used with threaded rod to securely suspend conduit runs supported from above. They are provided with stainless steel hardware.

Features:

- 20 mil gray PVC exterior coating
- 10 trade sizes from 1/2" through 4"



CONDUIT HANGER

PIPE SIZE	CATALOG #	NOMINAL WEIGHT
1/2"	CLH15P	0.1
3/4"	CLH20P	0.1
1"	CLH25P	0.1
1-1/4"	CLH32P	0.1
1-1/2"	CLH40P	0.2
2"	CLH50P	0.3
2-1/2"	CLH65P	0.4
3"	CLH80P	0.5
3-1/2"	CLH90P	0.6
4"	CLH100P	0.7

Thread Rods

Procoat PVC coated all thread rod is used with coated conduit hangers and coated strut to securely suspend conduit runs supported from above. It is provided in 3/8" and 1/2" sizes and three standard lengths, 3', 6' and 10'.

Features:

- 20 mil gray PVC exterior coating
- 2 trade sizes and 3 standard lengths



THREAD RODS

SIZE	CATALOG #
1/4" X 10'	FTR2510
3/8" X 10'	FTR3810
1/2" X 10'	FTR5010

PVC Coated Strut Straps

Procoat PVC coated strut straps are used with coated strut to support conduit installations in a variety of configurations. Strut straps may be used in either vertical or horizontal positions to support conduit. Are provided with stainless steel hardware. Conduit spacing may be as close together as allowed by the couplings.

Features:

- 20 mil gray PVC exterior coating
- Available in 11 trade sizes



Strut Straps

PVC COATED STRUT STRAPS


SIZE	FERROUS CATALOG #	GAUGE METAL	WEIGHT FOR 100 PCS	STD PACK
1/2"	CL15P	14	13.0	100
3/4"	CL20P	14	15.0	100
1"	CL25P	14	17.0	100
1-1/4"	CL32P	12	19.5	100
1-1/2"	CL40P	12	28.0	100
2"	CL50P	12	31.0	50
2-1/2"	CL65P	12	36.0	50
3"	CL80P	12	42.0	50
3-1/2"	CL90P	11	56.0	25
4"	CL100P	11	64.0	25

PVC Coated Ferrous Struts

Procoat PVC coated strut is a versatile system of structural elements that can be used to build supports for a variety of applications. When combined with coated conduit hangers and other accessories, coated strut is a versatile and economical way to provide reliable support for conduit runs and other electrical and mechanical installations.

Features:

- 20 mil gray PVC exterior coating
- 2 trade sizes and 3 standard styles



PVC COATED STRUT

FERROUS CATALOG #	DESCRIPTION	NOMINAL WT. PER 100 FT.	X	Y	STRUT THICKNESS
A12P	Channel	200	1.67	1.67	12 ga.
A12PP	Channel Slotted	185	1.67	1.67	12 ga.
A12AP	Channel Back to Back	380	1.67	3.29	12 ga.
C14P	Channel Shallow	135	1.67	0.92	12 ga.
C14PP	Channel Shallow Slotted	130	1.67	0.92	12 ga.

PVC Coated Spring Nuts

Procoat PVC coated strut nuts are used to assemble strut components and to secure coated all thread rod in a section of strut. These are available with or without a spring to aid in placement and assembly.

Features:

- 20 mil gray PVC exterior coating
- 03 trade sizes from 1/4" through 1/2"

PVC COATED SPRING NUT



FNS25P

PIPE SIZE	FERROUS CATALOG #
1/4"	FNS25P
3/8"	FNS38P
1/2"	FNS50P

Beam Clamps and U-Bolts

Procoat PVC coated beam clamps are used to securely support conduit runs by attaching them to beams, angles, trusses and other structural members. They are available in the following styles:

Parallel – to attach the conduit run parallel to a beam or structural member. **Edge** – to attach the conduit run at a 90° angle to a thin beam or structural member.

Right Angle – to attach the conduit run at a 90° angle to a beam or structural member.

U-Bolt – To attach the conduit run to a structural member or support. **Hanger Rod Beam Clamp** – to attach a single all thread rod to a beam or structural member.

Features:

- 20 mil minimum gray PVC exterior coating on all types of beam clamps
- Right angle clamps supplied with plastic encapsulated screws
- All clamps specifically sized to fit PVC coated conduit
- Right angle and parallel clamps available in 10 trade sizes 1/2" through 4"
- Edge clamps available in 3 trade sizes 1/2" through 1"
- Hanger rod beam clamps available with 5 different jaw openings 15/16" through 2-1/8"



Parallel Beam Clamp
**PARALLEL
CONDUIT CLAMP**

PIPE SIZE	FERROUS CATALOG #	NOMINAL WEIGHT
1/2"	PAR15P	46.8
3/4"	PAR20P	63.0
1"	PAR25P	67.0
1-1/4"	PAR32P	100.0
1-1/2"	PAR40P	130.0
2"	PAR50P	158.0
2-1/2"	PAR65P	175.0
3"	PAR80P	200.0
4"	PAR100P	275.0



Edge Beam Clamp
**EDGE STYLE
CONDUIT CLAMP**

PIPE SIZE	FERROUS CATALOG #	NOMINAL WEIGHT
1/2"	EDC15P	74.0
3/4"	EDC20P	90.0
1"	EDC25P	100.0




Right Angle Beam Clamp
**RIGHT ANGLE
CONDUIT CLAMP**

PIPE SIZE	FERROUS CATALOG #	NOMINAL WEIGHT
1/2"	RAN15P	49.0
3/4"	RAN20P	53.0
1"	RAN25P	61.0
1-1/4"	RAN32P	65.0
1-1/2"	RAN40P	92.0
2"	RAN50P	100.0
2-1/2"	RAN65P	125.0
3"	RAN80P	150.0
4"	RAN100P	198.0



U-Bolt
CONDUIT U-BOLT

PIPE SIZE	FERROUS CATALOG #	NOMINAL WEIGHT
1/2"	CLU15P	17.0
3/4"	CLU20P	18.0
1"	CLU25P	20.0
1-1/4"	CLU32P	20.0
1-1/2"	CLU40P	31.0
2"	CLU50P	34.0
2-1/2"	CLU65P	39.0
3"	CLU80P	44.0
4"	CLU100P	49.0

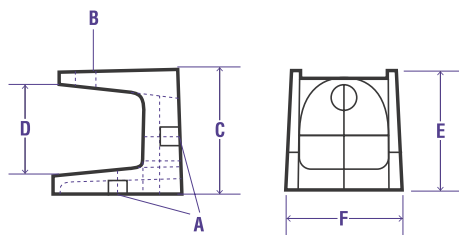

BEAM CLAMPS

PIPE SIZE	FERROUS CATALOG #	A	B	C	D	E	F	NOMINAL WEIGHT	MAXIMUM LOAD
1"	500P	1/4-20	5/16-1-1/8	1-3/8	7/8	1-1/4	1-1/8	25.0	500
1-1/4"	501P	5/16-18	3/8-16	1-3/4	7/8	1-5/8	1-1/2	50.0	800
1-1/2"	502P	3/8-16	1/2-13	2-1/16	7/8	2	2	90.0	2000
2"	503P	1/2-13	1/2-13	2-5/8	1	1-1/4	1-1/8	195.0	2000
2-1/2"	508P	1/2-13	1/2-13	2-1/4	7/8	2-1/2	2-5/8	25.0	4000



Contact us:
ventas@mabelec.biz



MABELEEC
Lighting and Electric Supply